

Mid level headends

K Series

Power supplies

The power supply units contain switching technology to ensure the best performance and reliability. They are protected from both momentary and long term overloads.

Isolation: class II.

Operating temperature: -10°C to +55°C.




Item	Code	Mains voltage	Power consumption	Output voltage	Max. current	Packaging
		Vac, Hz				
KP15	270018	220-240, 50-60	23	12	1.5	1
KP35	270017	220-240, 50-60	55	12	3.5	1
KP62	270019	220-240, 50-60	87	12	6.2	1

K Series

Accessories

Cabinets specially designed for easy installation and maintenance of MATV/SMATV headends.

- Perforated back for attaching the DIN bar. Thickness: 1.5mm
- Single structure (sides plus back) to be fixed at the rear
- Door with lock

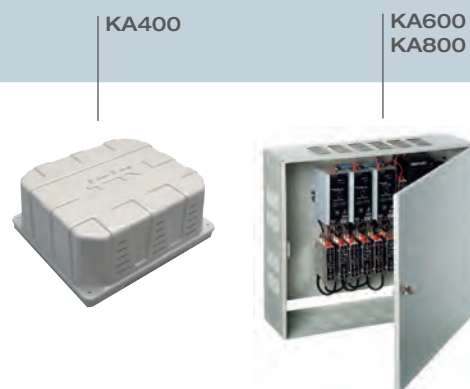

Item	Code	Length mm	Height mm	Width mm	Packaging Pcs
KA400	270001	390	340	170	1
KA600	293433	600	500	180	1
KA800	293434	800	500	180	1

Item	Code	Description	Packaging Pcs
KD100	289539	DIN BAR (35x15x1.5mm) galvanised Length 1m, used for installing K series modules.	20
TPE	282733	Programming unit Programming unit with numeric keypad and graphic display	1
CVDC50	280376	12V cable feed Length 50cm	1
KRS-RJ	282732	USB-RJ45 adapter	1