

Power Supply PSU3001/UK

SWITCH LINE



The PSU3001/UK power supply provides 18VDC voltage, 3A maximum.

The device includes two voltage inserters to divide the load with independent protection against overload current and threshold of 1.5A.

With F female connectors.

Isolation class II.

Main Specifications


- The PSU3001/UK works from 5 to 2400MHz with a 1.5dB insertion loss
- Isolation class II
- F female connectors
- Operating temperature: -10 to +55°C.
- The device includes two voltage inserters used to divide the load

		PSU3001/UK
Fracarro code		271159
Bandwidth	MHz	5÷2400
Output voltage	V	18
Max. output current (to be divided in to two lines)	A	3
Insertion loss	dB	1.5
General Parameters		
Supply voltage	V	220 – 240~ (max. 64W)
Isolation class	Class	II
Connector	Type	F
Dimensions (L x H x W)	mm	165 x 63 x 107
Operating temperature	°C	-10 to +55

Fracarro code	Item	Packaging	Quantity	Dimensions	Net weight	Total weight
			Pcs	mm	Kg	Kg
271159	PSU3001/UK	Single	1	168x218x108	1.11	1.20



Basic installation example using PSU3001/UK

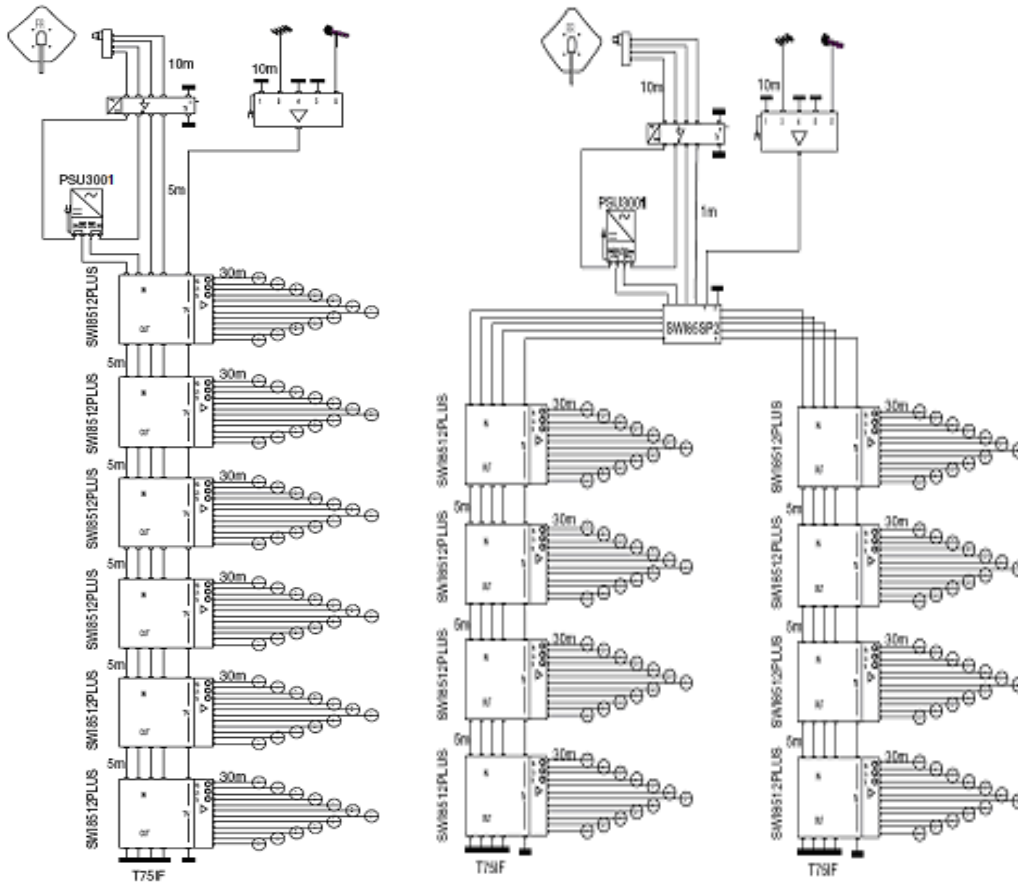

The two voltage inserters can be used to divide the load into two different lines or to supply two separate trunks.